

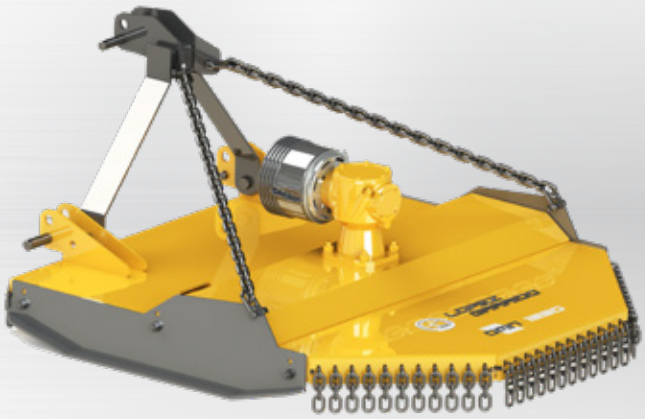

DMN

2

540
(rpm)

STRENX™ PERFORMANCE STEEL
HARDOX® IN MY BODY

Specially designed for clearing and maintaining fields and planta- tions.

Idéales pour le nettoyage et l'entretien des plantations et des cultures.

Mowers designed for low power tractors.

- Chassis made with high - strength steel.
- Rotor with 13 mm Grade 80 chains.
- Category I and II hitch.
- Front and rear protection chains.
- Height-adjustable skids.
- Gearbox 1"3/8 at 540 rpm.
- Reinforced shaft transmission.
- Meets relevant safety standards.
- CE certification.

Gyrobroyeur pour tracteur de petit puissance.

- Structure en acier suédois à haute limite d'élasticité.
- Rotor équipé avec chaînes 13 mm grade 80.
- Attelage CAT I et II.
- Protections avant et arrière avec chaînes.
- Patins réglables en hauteur.
- Groupe 1"3/8 et régime 540 rpm.Autocollants de sécurité.
- Cardan renforcé.
- Autocollants de sécurité.
- Certification CE.

Technical specifications / Caractéristiques techniques

CODE	WORKING WIDTH - LARGEUR DE TRAVAIL (mm)	WIDTH - LARGEUR (mm)	HEIGHT - HAUTEUR (mm)	LENGTH - LONGUEUR (mm)	CHAINS - CHAINES	POWER - PUISSANCE MIN-MAX (HP-CH)	WEIGHT - POIDS (kg)	RPM - TPM
091468248	1.000	1.150	750	1.250	2	25 - 40	150	540
091468249	1.250	1.350	750	1.400	2	25 - 40	175	540

Optional / Opcion

CODE	DESCRIPTION
060467168	Rotor chain / Chaîne de rotor

MEDIA

WEB